




Timberex Oil & Wax Remover

The Alternative to Sanding

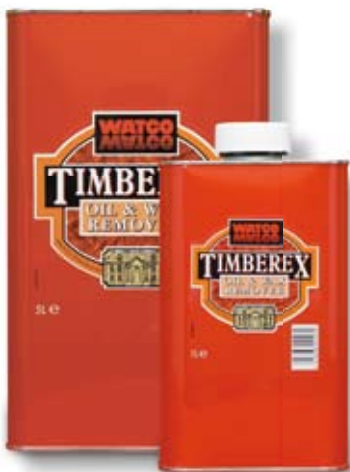

TIMBEREX Oil & Wax Remover offers a alternative to sanding by chemically removing any oil or wax residues on a wooden surface without damaging the wood.

By simply adding more or less water to the TIMBEREX Oil & Wax Remover, the strength of the product can be adjusted to fit the project at hand.

- Easy and Safe Application
- Dries within minutes
- Removes accidental splashes on surrounding surfaces and tools

The Finest Natural Protection



Timberex Oil&Wax Remover

The Alternative to Sanding

PREPARATION

Clean the surface by vacuuming and damp wipe the entire floor using a very well wrung-out cloth, and allow to dry.

APPLICATION

It is advisable to test a small area first to ensure that the desired result is achieved. The product can be mixed with up to 50% cold water although the more oil or wax that has to be removed, the less water is needed. Any diluted mixture should not be stand for more than 1 hour before application.

1. Apply the concentrated or diluted liquid with a cloth or mop. Leave for 5-10 minutes.
2. Buff the surface carefully using a red (medium coarse) nylon pad to remove the oil or wax residue. It might be necessary to use a coarse (brown) nylon pad in situations with large amounts of oil or wax on the surface.
3. Remove the excess using a cloth or mop.
4. Rinse the surface carefully twice with clear water and TIMBEREX Bio-C Cleaner. Wipe dry with a cloth.

In extreme situations, it might be necessary to repeat steps 1-4 for the desired effect.

When the treatment has finished, we recommend to leave the surface to dry overnight. As soon as the surface is dry, it can be treated with a new layer of oil or wax for renewed protection.

SAFETY

Material Safety Datasheets are available at www.timberex.com



Timberex International
RUST-OLEUM MATHYS
Kolenbergstraat 23
B-3545 Zelem - Belgium
Tel: +32 (0)13 460 0200 - Fax: +32 (0) 13 460 0219
www.timberex.com

